

Curtain Remote Controller Myers MRC-RF

for MCR-220V500W ZB+RF

User manual



**PREMIUM SMART HOME SYSTEMS
by PARTIZAN**


WWW.PARTIZAN.GLOBAL

2022





| | |
|--|---|
| 1. Main elements of the device | 3 |
| 2. Smart Curtain Controller setting up | 4 |
| 3. Technical specification..... | 5 |

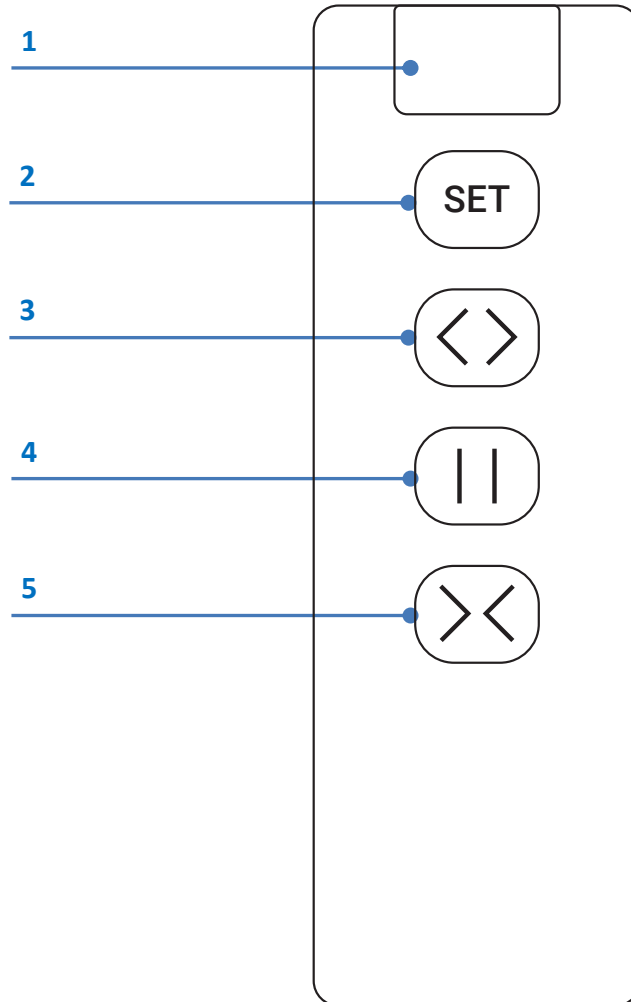1. Main elements of the device

This remote control is used to remotely control the MCR-220V500W ZB+RF Smart Curtain Controller. The remote control supports connection to 9 such devices on 9 channels numbered from 0 to 8.




1. Digital display that illuminates the channel (device) number
2. Select button/Channel settings (device)
3. Open the curtain/Switch device "up"
4. Stop the curtain (pause)
5. Close the curtain/Switch the device "down"

To select the necessary channel for control, you need to press the button . The digital display will show the flashing number of the active channel. To change the channel number, press  or . After determining the desired channel, press  and proceed to control of the curtain.

2. Smart Curtain Controller setting up



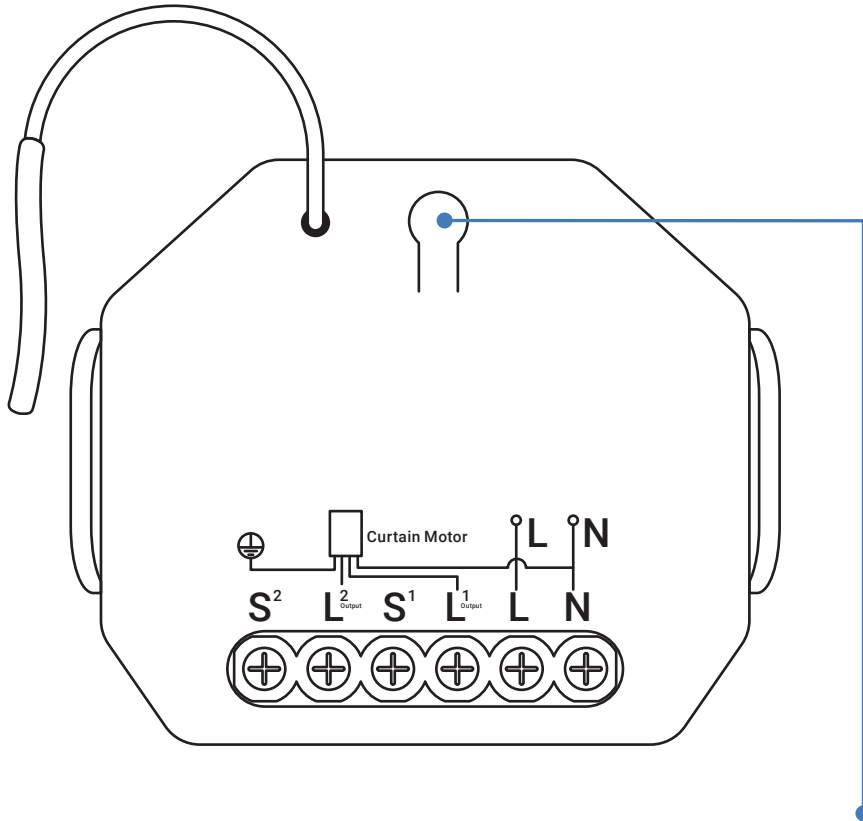

Connecting the remote control to MCR-220V500W ZB+RF and further channel settings are done using RF (radio frequency).






The outward of MCR-220V500W ZB+RF and the Reset button on it.

In order to configure the remote control to work with the Smart curtain controller Myers MCR-220V500W ZB+RF, you must perform the following actions:

1. Connect ZigBee Hub and add it to the Partizan Cloud account.
2. Add Smart curtain controller MCR-220V500W ZB+RF to ZigBee Hub.
3. To configure each of the buttons, it is necessary to switch the relay to the appropriate RF connection mode. To do this, you need to apply the Reset button directly on the MCR-220V500W ZB+RF according to the instructions below.
 - Select the necessary channel for tuning by pressing **SET** button similarly to the actions described in section #1. Use the or buttons **<>** or **><** to select the desired channel. Press **SET** button again.
 - To set the "Open" button **<>** , press the Reset button on MCR-220V500W ZB+RF 5 times, wait 3 seconds. Press **<>** button on the remote control again.

- To set the "Close" button  , press the Reset button on MCR-220V500W ZB+RF 6 times, wait 3 seconds. Press  button on the remote control again.
- To set the "Pause" button  , press the Reset button on MCR-220V500W ZB+RF 7 times, wait 3 seconds. Press  button on the remote control again.

After that, the "Open"  , "Close"  , "Pause"  buttons will be available to control the MCR-220V500W ZB+RF Smart Curtain Controller.

WARNING! Remember on which channel a certain curtain is configured!

3. Technical specification

- Operating voltage: DC 12V
- Operating temperature: -20 °C to +60 °C
- Frequency: 433.92 MHz
- Operating current: ≤ 16 mA
- Number of channels: 9

Technical support:

E-mail: support@partizan.global

Skype: partizan-support

Chat: +420 777 054 888 (Viber, Telegram, WhatsApp)



Technical support working time:

<https://partizan.global/support/technical-support>



Partizan software:

<https://apps.partizan.global/>