



- 2.0 Mp resolution
- Built-in IPS display
- Abnormal body temperature identification
- Mask identification
- Face recognition
- Wiegand output interface
- Internal memory 16GB
- Pole mount design
- IP34 rating


Your manual is here:
<http://manuals.partizan.global>



Partizan software:
<http://apps.partizan.global>



Wiring diagram

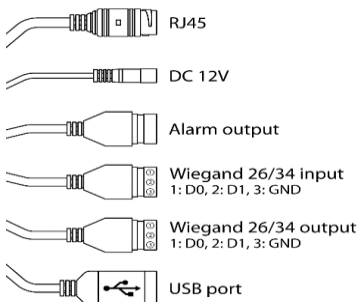

Smart Terminal		
Model		STD-2MP
Version		PM
Image Sensor		
Sensor		1/2.7" CMOS FullHD
Pixel Size, μm		2.8x2.8
Resolution, pixels@fps	Mainstream	PAL: 1920x1080@25
Day/Night mode	Auto	+
	Color	-
	Black&White	-
Sensitivity, Lux		0.01
Dynamic range WDR, dB		80
S/N ratio, dB		50
Video functions		Exposure, Gain, Contrast, Saturation, Face Exposure compensation
Codec profile	H.264/H.265	Baseline / Main / High
Exposure mode, s	Auto	1/5-1/20000
	Manual	1/5-1/20000
Bitrate Type, kb/s	Constant	256-12288
	Variable	Worst/Worse/General/Good/Better/Best
Face Recognition		
Alarm type	Abnormal body temperature	+
	No mask	+
	Face recognition	+
Face recognition distance, m		≤ 3.0
Face recognition rate		$\geq 98\%$
Face recognition time, ms		< 500
Portable database	Faces	22400
	Events	100000
Temperature Measurement		
Distance, m		≤ 1.0
Measurement range,		30 ~ 45
Temperature measurement accuracy,		+/-0.3
Temperature measurement time, ms		< 2000
Network		
Network interface		RJ-45 (10/100Base-T)
Wi-Fi standard/frequency		-
Network functions		DDNS/IPFilter/E-mail/NTP/PPPoE/UPNP/FTP/RTSP
Languages supported		English, German, Russian, Italian, French, Portuguese, Spanish, Turkish
Default IP address		DHCP (Auto)
Username		admin
Password		admin
HTTP port		80
ONVIF port		2000
RTSP port		554
RTSP string	Main stream	rtsp://IPaddress:port/av0_0&user=admin&password=admin
	Substream	rtsp://IPaddress:port/av0_1&user=admin&password=admin
Control port		5000
Configuration software		Partizan, Web interface (IE)
Monitoring program		Partizan STD
Mobile software (support)		Partizan
Protocol integration		ONVIF 2.4
Dimensions		
Size, mm	Total length	321
	Housing	154x271x56
	Bracket	-
Weight, g		2100
Common		
Power Supply	DC12V, A	3
	PoE Class/W	-
Display		7", IPS
Alarm	Inputs	-
	Outputs	+ (NO/NC)
Audio	Inputs	-
	Built-in speaker	+
Memory	Internal	16Gb
	Memory card	-
Access control output		Wiegand 26/34
USB port, pcs		1
Housing material, plastic/metal		-/+
Bracket material, plastic/metal		-/+
IP rating		34
IK rating		-
Operating temperature, $^{\circ}\text{C}$		0 - +55
Warranty, years		3

*Note: the functions, interface, component parts and the working sequence of the device are subject to alteration without prior notice from the manufacturer due to updates of the device itself as well as its software.