





- Colour CMOS camera
- Resolution: 600 TVL
- Vandal-proof design
- IP 44 rating
- Angel bracket and waterproof cover
- IR leds
- Relay lock control


Installation manual

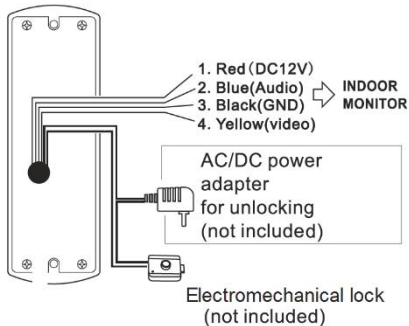

Angle mount

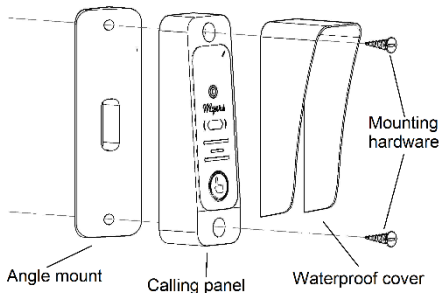

Surface mount



| Calling video panel | |
|------------------------------------|-------------------------------------------------------|
| Model | D-300 |
| Version | - |
| Colour | Black |
| Camera | |
| Sensor | 1/3" Pixel Plus |
| Resolution | 600 TVL |
| Day/Night mode | Auto |
| Photosensitivity, Lux | 0.5 |
| Video system | PAL/NTSC |
| Video output | 1 Vpp, 75Ω |
| Lens | |
| Focal length, mm | 2.8 |
| Iris, F | 1.4 |
| Horizontal angle of view, ° | 120 |
| Vertical angle of view, ° | 83 |
| lens Type | Spherical |
| IR LED | |
| Distance, m | 3 |
| Number of LEDs, pcs. | 5 |
| Beam Spread, ° | 60 |
| Wavelength, nm | 850 |
| Dimensions | |
| Size, mm | 130x48x32 |
| Weight, g | 340 |
| Common | |
| Power | DC 12V/0.2A (from intercom) |
| Relay | NO/NC |
| Housing material | Metal |
| Bracket material | Metal |
| IP rating | 44 |
| Operating temperature, °C | -40 ~ +60 |
| Accessories | Angel bracket, waterproof cover, mounting kit. |
| Warranty, years | 2 |



Attention!

- Only qualified technician should be authorized to service this equipment
- Avoid placing the device near sources of strong electromagnetic radiation.
- Do not install the device in places exposed to direct sunlight, rain, extremely high temperatures, high humidity levels, high dust levels and aggressive chemicals.
- The most appropriate place to install the device is at the level of the user's eyes.
- Prior to installation and removal of the device please make sure that the power supply is off.
- Install the device at least 30cm away from the power supply lines to avoid interference.
- Avoid ingress of moisture, foreign particles, and insects into the device enclosure.