




# Videophone Myers M75SD HD v2.0 Metal

ENG



- Colour 7.0" TFT monitor with Touch screen
- Resolution: 1024X800
- Supports two call panels and two CCTV cameras
- Intercom mode
- Lock control

## Installation manual

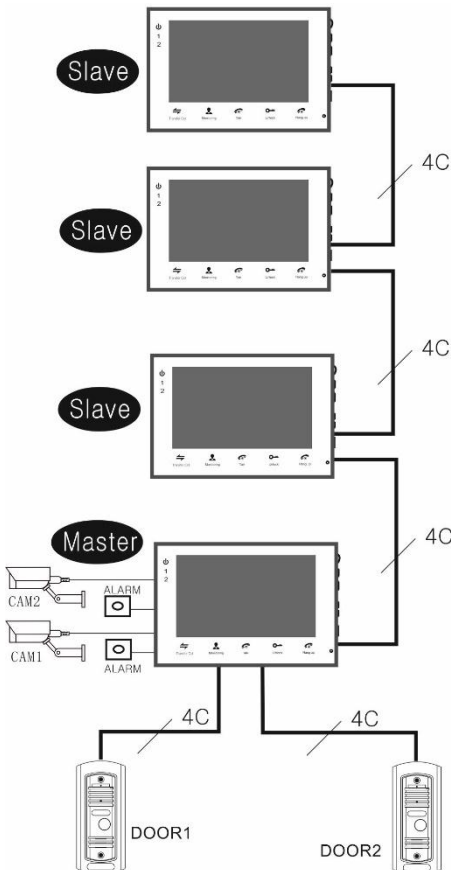

Videophones	
<b>Model</b>	M75SD
<b>Version</b>	HD v2.0 Metal
<b>Colour</b>	Silver
Monitor	
<b>Display</b>	7.0" TFT Touch screen
<b>Resolution</b>	1024x800
<b>Video system</b>	PAL/NTSC
<b>Video output</b>	1 Vpp, 75Ω
Communication	
<b>Support call panels, pcs./Standart</b>	2 /AHD-M or CVBS
<b>Support CCTV camera, pcs./Standart</b>	2 /AHD-M or CVBS
<b>Support monitor (intercom), pcs.</b>	4
<b>Delay calling time, c</b>	120
<b>Support SD-card</b>	+ / Up to 32 Gb (not included)
<b>Record photo/video</b>	+ / (on SD card)
<b>Hands-Free</b>	+
Dimensions	
<b>Size, mm</b>	237.9x144.1x19.5
<b>Weight, g</b>	340
Common	
<b>Power</b>	AC 220-240V
<b>Housing material</b>	Metal
<b>Bracket material</b>	Metal
<b>Operating temperature, °C</b>	+10~ +50
<b>Accessories</b>	Bracket, mounting kit.



## Attention!

- Only qualified technician should be authorized to service this equipment
- Avoid placing the device near sources of strong electromagnetic radiation.
- Do not install the device in places exposed to direct sunlight, rain, extremely high temperatures, high humidity levels, high dust levels and aggressive chemicals.
- The most appropriate place to install the device is at the level of the user's eyes.
- Prior to installation and removal of the device please make sure that the power supply is off.
- Install the device at least 30cm away from the power supply lines to avoid interference.
- Avoid ingress of moisture, foreign particles, and insects into the device enclosure.