




- AHD/TVI/CVI/CVBS camera
- 2.0 Mp resolution
- Varifocal lens
- IR leds
- Weatherproof housing
- IP66 rating
- 3-Axis mounting
- OSD menu

Operation mode selection

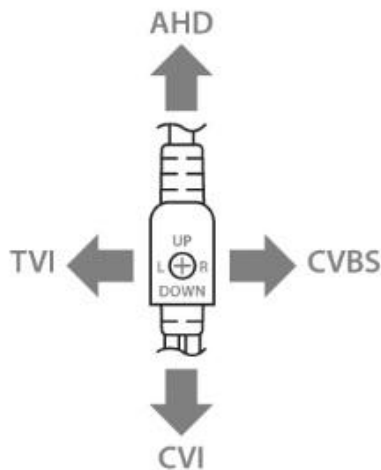

How to change an operating mode:
 1. Restart the camera (power off then on)
 2. Hold the button in the necessary mode direction for 5 seconds according to the picture above.

AHD Camera		
Model		COD-VF4HQ SF
Version		FullHD 1.0
Built-in OSD menu		+
Operating the integrated OSD menu	Joystick on the cord	+
	UTC controller	-
Image Sensor		
Sensor		1/2.8" Full HD Sony Ultra
Pixel Size, μm		2.8x2.8
Resolution	PAL	AHD-H: 1920x1080@25fps, TVI: 1920x1080@25fps, CVI: 1920x1080@25fps, Analog: 1300TVL
	NTSC	AHD-H: 1920x1080@30fps, TVI: 1920x1080@30fps, CVI: 1920x1080@30fps, Analog: 1300TVL
Day/Night mode		Auto/Color/Black&White
Sensitivity, Lux		0.01
Video functions		AES, AGC, AWB, BLC, HLC, OSD, PrivacyMasks
Dynamic range WDR, dB		72
S/N ratio, dB		48
Video output		1Vpp, 75 Ω
Exposure mode	Auto, s	+
	Manual, s	1/50 – 1/10000, 1/60-1/10000
Lens		
Focal length, mm		2.8 – 12
Iris, F		1.4
Angle of View, $^{\circ}$	Horizontal	91 – 27
	Vertical	75 – 20
lens Type	Aspherical	-
	Spherical	+
Lens mount		M12
Control		Manual
IR LED		
Distance, m		Up to 60
Number of LEDs, pcs.		10 array LED
Beam Spread, $^{\circ}$		60
Wavelength, nm		850
IR Cut Filter		Auto
Dimensions		
Size, mm	Total length	280.5
	Housing	$\varnothing 84 \times 128$
	Bracket	$\varnothing 84 \times 152.5$
Weight, g		750
Common		
Power Supply	DC12V, A	0.8
Alarm	Inputs	-
	Outputs	-
Housing material		Metal
Bracket material		Metal
IP rating		66
IK rating		-
Operating temperature, $^{\circ}\text{C}$		-40 - +60
Warranty, years		3