




- Operating frequency: 13.56 MHz
- Identifiers: Mifare
- Reading distance: up to 40 mm
- Output interface: Wiegand 26

Reader	
Model	PAR-M12
Version	Black
Output interface	Wiegand 26
Card reader standard	Mifare
Reader frequency	13.56 MHz
Installation method	Surface mount
Interface	
Reading distance, mm	Up to 40
Reading speed, card/s	2
Light indication	Dual-color led (red, green)
Sound indication	+
Mean time between failures, hours	Not less then 10000
Additional function	-
Dimensions	
Size, mm	125x83x22
Weight, g	150
Common	
Power	DC 12V/50mA
Casing material	Plastic
Color	Black
IP rating	66
IK rating	-
Operating temperature, °C	-20 - +50
Warranty period, year	3

*Note: the functions, interface, component parts and the working sequence of the device are subject to alteration without prior notice from the manufacturer due to updates of the device itself as well as its software.

Connection diagram:

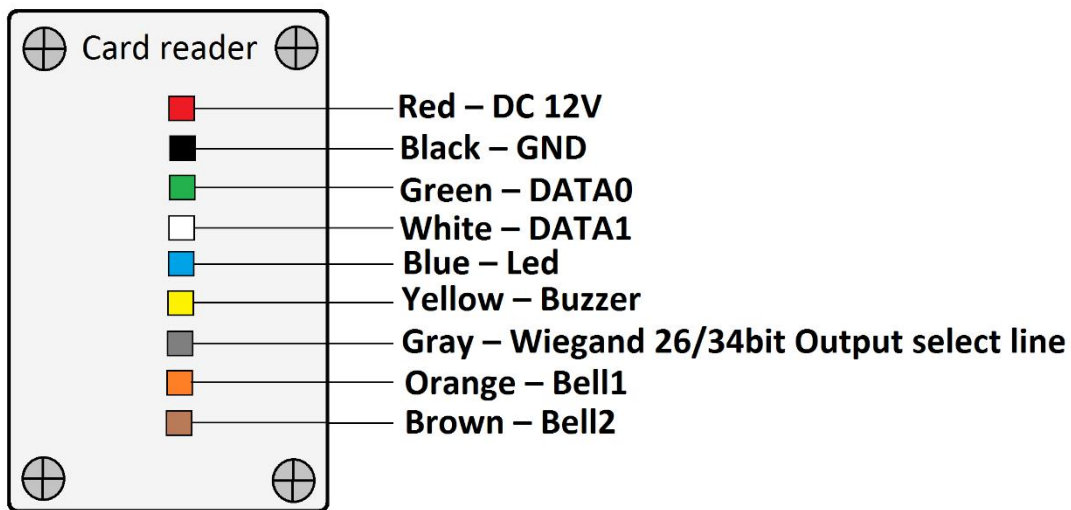

*Note: the colour marking of the wires may vary from the one used in the scheme. Please check the code marking compliance for the correct connection of the device.