




- 1 Door controller
- Max number of users 2000

Network controller		
Model	PAS-E12	
Version	-	
Doors	1	
Number of readers	2(1 built-in EM-Marin)	
Card reader interface	Wiegand 26	
Card reader standard	EM-Marin	
Reader frequency	125 KHz	
Max number of users	2000	
Max number of events	-	
Communications interface		
Accessories	-	
Door sensor, pcs.	-	
Exit button	1	
Fire unlock	-	
Non-volatile memory	+	
Fire alarm	Inputs, pcs.	-
	Outputs, pcs.	-
Alarm	Inputs, pcs.	-
	Outputs, pcs.	-
Lock output	Relay, pcs. (A)	1, 2A
	Electromechanical lock	-
	Magnetic lock	-
Communication distance	-	
Communication interface	-	
Data protection if no power supply, year	-	
Network		
Ethernet	-	
Web-interface	-	
Languages	-	
Default IP address	-	
Login	-	
Password	-	
Web port	-	
Control port	-	
Software supported	-	
Mobile software	-	
Dimensions		
Size, mm	45x120x18	
Weight, g	100	
Common		
Power	DC 12V/100mA	
Casing material	Plastic	
IP rating	55	
IK rating	-	
Operating temperature, °C	-20 - +50	
Warranty period, year	3	

*Note: the functions, interface, component parts and the working sequence of the device are subject to alteration without prior notice from the manufacturer due to updates of the device itself as well as its software.

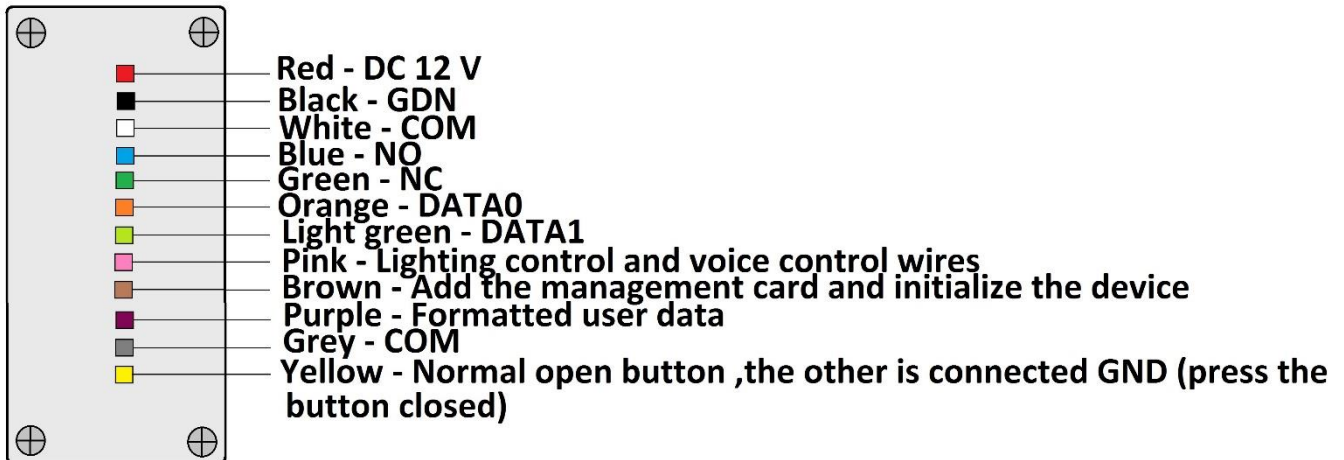

*Note: the colour marking of the wires may vary from the one used in the scheme. Please check the code marking compliance for the correct connection of the device.

Precautionary measures

- Do not connect the controller to the power supply from unstabilized power, this can lead to fire, electric shock or other hazards.
- Power supply and operating temperature must correspond the performance requirements of the product.
- Do not install the controller near a radiator or heaters.
- Do not use the controller without lightning protection equipment.
- The manufacturer is not responsible and will not reimburse damages for defects caused by the fault of the consumer at non-compliance with the rules of operation and installation.
- Do not attempt to repair, as this will void the warranty. If you have any fault, please contact your dealer or certified service center.
- Be sure to read the conditions of the warranty services that are included.